

10-2-0

A

Attorney Docket No.: PALM-2921.US.P

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE****Patent Application**

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.	EL676374888US	Name of Person Making the Deposit.	ANTHONY CHOU
Date of Deposit:	09/29/00	Signature of the Person Making the Deposit:	<i>Anthony Chou</i>

Inventor(s): Shawn Gettemy and Rajiv Pethe

Title: A PERSONAL DIGITAL ASSISTANT DISPLAY ILLUMINATION METHOD AND SYSTEM

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Sir:

**Transmittal of a Patent Application**  
(Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 27 pages.  
 Formal drawings, totaling        pages.  
☒ Informal drawings, totaling 13 pages.  
☒ Declaration and Power of Attorney.  
 Information Disclosure statement.  
 Form 1449  
☒ Assignment(s)  
☒ Assignment Recordation Form (duplicate)  
 Preliminary Amendment

**FEES DUE**

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$690.00
Total Claims	20	Minus 20=	0	X \$18 =	\$0.00
Independent Claims	3	Minus 3=	0	X \$78=	\$0.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					\$40.00
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$730.00</b>

## PAYMENT OF FEES

The full fee due in connection with this communication is provided as follows:

1. Not enclosed
  - ☐ No filing fee is to be paid at this time.
2. Enclosed
  - ☒ Filing fee
  - ☒ Recording assignment
  - ☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached
  - ☐ For processing an application with specification in a non-English language
  - ☐ Processing and retention fee
  - ☐ Fee for international-type search report
  - ☒ The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No.: 23-0085. A duplicate copy of this authorization is enclosed.
  - ☒ A check in the amount of \$730.00
  - ☐ Charge any fees required or credit any overpayments associated with this filing to Deposit Account No.: 23-0085.

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).

Please direct all correspondence concerning the above-identified application to the following address:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street, Third Floor  
San Jose, California 95113  
(408) 938-9060

- ☒ This transmittal ends with this page.

Respectfully submitted,

Date: 9/29/00

By: John F. Ryan  
John F. Ryan  
Reg. No. 47,050

PALM-2921 US P

UNITED STATES PATENT APPLICATION FOR

A PERSONAL DIGITAL ASSISTANT DISPLAY  
ILLUMINATION METHOD AND SYSTEM

Inventor:

Shawn Gettemy

Rajiv Pethe

Prepared by:

WAGNER, MURABITO & HAO LLP

TWO NORTH MARKET STREET

THIRD FLOOR

SAN JOSE, CALIFORNIA 95113

(408) 938-9060

A PERSONAL DIGITAL ASSISTANT DISPLAY  
ILLUMINATION METHOD AND SYSTEM

BACKGROUND OF THE INVENTION

5

Field Of The Invention

This invention relates to the field of handheld computers and display illumination. In particular, the present invention relates to an efficient personal digital assistant display illumination system and method that is easily adaptable to integrate touchpad capability.

10

Related Art

Electronic systems and circuits have made a significant contribution towards the advancement of modern society and are utilized in a number of applications to achieve advantageous results. Numerous electronic technologies such as digital computers, calculators, audio devices, video equipment, and telephone systems facilitate increased productivity and cost reductions in analyzing and communicating data, ideas and trends in most areas of business, science, education and entertainment. Electronic systems designed to produce these results often include electronic displays, such as a portable handheld computer display screen. Traditional display screen illumination techniques in a handheld computer usually result in uneven and inefficient illuminating of a presentation on the display screen.

15

20

Typically, the primary function of a display screen is to provide a clear and readily viewable presentation to a user. One of the most important factors affecting a users ability to easily perceive the shapes or images of a presentation is sufficient illumination of the display screen. Ambient light is often insufficient to provide adequate illumination of a display screen and a display screen usually includes lighting provisions such as a backlight. Effective distribution of light from a light source to the display screen significantly impacts the clarity of a display screen presentation.

Traditional computer display illumination techniques often provide light from a single source onto a light pipe and rely on the light pipe to function as a distribution medium. While a light pipe does provide some beneficial distribution characteristics, light emanating from a single source usually does not get distributed evenly through a light pipe and some areas of a display screen often appear significantly darker than other areas. It is usually more appealing to have an evenly illuminated display screen. Evenly illuminated display screens usually provide a more pleasant viewing experience without significant contrasts. Traditional illumination attempts sometimes rely on a relatively large light source that consumes considerable energy and while it may increase illumination to darker areas of a display screen it usually does not solve contrast problems because some areas of the display screen still typically appear very bright compared to others. Figure 1 is

shows an illumination display pattern of a prior art display screen in which areas 111, 112 and 121 are darker than 107 which is darker than 105. Light waves from light source 131 that travel some distance (e.g., 195) to the light pipe 145 often miss the light pipe and are absorbed by the device body 150.

5

As the components required to build a computer system have reduced in size, new categories of computer systems have emerged. One of the new categories of computer systems is the hand held or "palmtop" computer system. A palmtop computer system is a computer that is small enough to be held in the hand of a user and is often "palm-sized." Most palmtop computer systems are used as Personal Digital Assistants (PDAs) to implement various Personal Information Management (PIM) applications such as an address book, a daily organizer, and electronic notepads, to name a few. Even though palmtop computer systems are very small, they typically provide diverse functionality and their capabilities are constantly increasing. Display capabilities of handheld computers are becoming increasingly important and due to the relatively small size of the display in a handheld computer it is important for the presentation to be clear and well illuminated.

10  
15

20

The relatively small size of a typical handheld computer increases the difficulty of accomplishing a number of operations, including illuminating a display. Typically, the compactness of a handheld computer limits the size of a light source and it is important to effectively utilize the limited light

emissions. A light pipe in a handheld computer is usually so thin that significant portions of the light generated by a light source miss the light pipe and are absorbed by relatively non reflective materials that form other portions of the hand held computer.

5

Efficient distribution of light to a display usually facilitates significant improvements in display presentations. Typically, the more efficiently light is delivered to a display the clearer the presentation of shapes and images and the more pleasurable the viewing experience is for a user. Efficient lighting of a display also permits a smaller light source and a smaller light source consumes less of the limited energy supply most portable handheld computers rely on to supply power. Displays that are easy to view and smaller components (such as a light source or battery) facilitate palmtop computers size reductions allowing greater portability and ease of use.

10

15

What is required is a system and method that facilitates efficient and relatively even distribution of illumination throughout a display. The system and method should also facilitate clearer presentation of images, size reductions and conservation of limited power resources in handheld computers.

20

## SUMMARY OF THE INVENTION

The present invention system and method facilitates efficient and relatively even distribution of illumination throughout a display. The system and method should also facilitate clearer presentation of images, size reductions and conservation of limited power resources in handheld computers. In one embodiment of the present invention, a display illumination distribution system includes a light pipe, a lens, a wave guide array and a light source. The light source provides light waves that are directed along the wave guide array to the lens which direct the light waves into a light pipe included in a display module. The routing of light through the wave guide array confines the light waves to a wave guide and reduces the number of light waves that miss the light pipe. In one embodiment of the present invention the interior walls of each wave guide comprise a highly reflective material that reflects light waves down the length of the wave guide with minimal light loss due to absorption. In one embodiment of the present invention, the display illumination distribution system and method directs visible light waves through a wave guide array to multiple points along the edge of a light pipe included in the display module and provides more effective distribution of light into the light pipe.



## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a top view of prior art display illumination pattern.

5        Figure 2A is a top view of a block diagram of a display illumination distribution system, one embodiment of the present invention.

Figure 2B is a side view of a block diagram of a display illumination distribution system, one embodiment of the present invention.

10

Figure 2C is a top view of a present invention display illumination pattern.

15        Figure 2D is block diagram illustrating one exemplary implementation of a display illumination distribution system comprising a light pipe, display and optional protective shield.

20

Figure 3A is a perspective illustration of the top face of one embodiment of a hand held or palmtop computer system.

Figure 3B illustrates the bottom side of one embodiment of a hand held or palmtop computer system.

Figure 3C is an exploded view of a hand held computer system in accordance with one implementation of the present invention.

Figure 4 is a block diagram of a computer system included in one  
5 embodiment of the present invention.

Figure 5A is a side view of a block diagram of another embodiment of a present invention display illumination distribution system.

10 Figure 5B is a top view of a block diagram of another embodiment of a present invention display illumination distribution system.

Figure 5C is a is a top view of a block diagram of a display illumination distribution system at the pipe light level.

15 Figure 6 A is a block diagram of one embodiment of the present invention comprising two separate wave guide arrays, one for sensory light and the other for visible light waves.

20 Figure 6 B is a block diagram of one exemplary implementation of the present invention comprising a lens that serves to disperse both the illumination and sensory light waves.

Figure 7 is a flow chart of a display illumination distribution method, one embodiment of the present invention.

CONFIDENTIAL

## DETAILED DESCRIPTION OF THE INVENTION

Reference will now be made in detail to the preferred embodiments of the invention, a system and method to illuminate a personal digital assistant display, examples of which are illustrated in the accompanying drawings.

While the invention will be described in conjunction with the preferred embodiments, it will be understood that they are not intended to limit the invention to these embodiments. On the contrary, the invention is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the invention as defined by the appended claims. Furthermore, in the following detailed description of the present invention, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be obvious to one ordinarily skilled in the art that the present invention may be practiced without these specific details. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the current invention.

Figure 2A is a top view and Figure 2B is a side view of a block diagram of display illumination distribution system 200, one embodiment of the present invention. Display illumination distribution system 200 comprises light source 210, wave guide array 220, lens 230 and light pipe 243. Light source 210 provides light to wave guide array 220. Wave guide array 220

includes a plurality of wave guides (e.g., in a fishbone pattern) each directing light waves from light source 220 to a lens (e.g., lens 230). The lens directs the light waves into light pipe 243 for distribution of the light waves throughout the light pipe and conveyance by light pipe 243 to a display. Figure 2D is block diagram illustrating one exemplary implementation of display illumination distribution system 200 comprising light pipe 243, display 245 and optional protective shield 247. In one embodiment of the present invention, display 245 is component that has the information for actively displaying an image on it and in one exemplary implementation includes filters and polarizers. Protective shield 247 protects display 245 from physical damage.

The components of display illumination distribution system 200 cooperatively operate to facilitate efficient distribution of light. The routing of light through wave guide array 220 confines the light waves to the wave guide and provides more effective distribution of light waves into light pipe 243. By confining the light waves to the wave guide array 220 less light waves are wasted (e.g., miss the light pipe) and absorbed by relatively non reflective materials (not shown) surrounding the display module. In one embodiment of the present invention the interior walls of each wave guide comprise a highly reflective material that reflects light waves down the length of the wave guide with minimal light losses due to absorption.

The light waves are directed to a plurality of points at the edges of light pipe 243 providing more even distribution. Figure 2C is an illustration of one embodiment of light distribution in display illumination distribution system 200. Not all emissions from the lenses are shown. Figure 2C shows the

5 overlapping effects and more even distribution of light emitted from lenses at the ends of the wave guide array. Light waves from the intermediate lenses are not shown so as not to obscure the overlapping effects. In one embodiment of the present invention the light waves are distributed from wave guide array 220 so that they form an overlapping grid resulting in an  
10 increase in light intensity for the display. For example, wave guide array 220 directs light to a top or bottom side and a right or left side of a light pipe so that some light waves travel in one direction across a light pipe and some travels in another perpendicular direction resulting in a greater intensity of light emitted from the light pipe than if the light waves were just traveling in  
15 one direction through the light pipe.

It is appreciated that there are a variety of different implementations of display illumination distribution system 200. For example, light pipe 243 is a backlight as shown in Figure 2D in one embodiment of the present invention  
20 and a frontlight in another embodiment of the present invention (not shown). In one embodiment of the present invention there is a single long lens that receives the light waves from wave guide array 120 and directs them onto the light pipe 243. In one embodiment of the present invention, light

pipe 243 is a straight through light pipe and in another embodiment light pipe 243 includes microstructures. In one exemplary implementation of the present invention optional protective shield 247 comprises a plastic substrate and in another it is a glass substrate. In yet another embodiment of the present invention the wave guide array and lens direct light to all four sides of light pipe or on one side.

A display illumination distribution system is flexibly adaptable to a variety of implementations, for example a portable or palmtop computer.

10 Figure 3A is a perspective illustration of the top face 300a of one embodiment of a hand held or palmtop computer system. The top face 300a includes a display module 305 for displaying images and information to a user. Display module 305 comprises display illumination distribution system 200. Display module 305 also includes an interface board, driver, controller, bezel, a touch  
15 screen and support structures in one embodiment of the present invention. The touch screen able to register contact, for example contact between the screen and the tip of the stylus 303 or a finger.

Figure 3A also illustrates a handwriting recognition pad or "digitizer" containing two regions 306a and 306b. Region 306a is for the drawing of alpha characters therein for automatic recognition and region 306b is for the drawing of numeric characters therein for automatic recognition. A removable stylus 303 and on/off button 301 are also shown. The stylus 303 is

used for stroking a character within one of the regions 306a and 306b. The stroke information is then fed to an internal processor for automatic character recognition. Once characters are recognized, they are typically displayed on the screen 305 for verification and/or modification. The top face 300a also  
5 includes one or more dedicated and/or programmable buttons 307 for selecting information and causing the computer system to implement functions.

Figure 3B illustrates the bottom side 300b of one embodiment of a hand  
10 held or palmtop computer system. An optional extendible antenna 304, a battery storage compartment door 309, and a serial communication interface 208 are shown. Extendible antenna 304 is utilized for wireless communications (e.g., cellular phone, radio, etc.). Battery storage compartment door 309 provides access for battery replacement. Serial  
15 communication interface 308 provides a communication port for communications with peripheral devices (e.g., a palm cradle, landline phone modem, etc.).

Figure 3C is an exploded view of the hand held computer system 300 in  
20 accordance with one implementation of the present invention. Hand held computer system 300 includes front cover 310 having an outline of region 306 and holes 375a for receiving buttons 375b. A flat panel display module (e.g., including a liquid crystal display and touch screen) fits into front cover 310.



Any of a number of display technologies can be used (e.g., LCD, FED, plasma, etc.) for the flat panel display included in display module 305. A battery 315 provides electrical power. A contrast adjustment (potentiometer) 320 is also shown. On/off button 395 is shown along with an infrared emitter and detector device 364. A flex circuit 330 is shown along with a PC board 325 containing electronics and logic (e.g., memory, communication bus, processor, etc.) for implementing computer system functionality. The digitizer pad is also included in PC board 325. A midframe 335 is shown along with stylus 380.

Hand held computer system 300 is capable of communicating with other devices. Position adjustable antenna 385 for transmitting and receiving communication signals is shown. A radio receiver/transmitter device 340 is also shown between the midframe and the rear cover 345 of Figure 3. The receiver/transmitter device 340 is coupled to the antenna 385 and also coupled to communicate with the PC board 325. In one implementation of the present invention, the Mobitex wireless communication system is used to provide two way communication between system 300 and other networked computers and/or the Internet via a proxy server. Communication interface 377 is coupled to PC board 325 and provides a communications port (e.g., a serial port) for communicating signals to and from a peripheral device.

Figure 4 is a block diagram of computer system 400, some of which is implemented on PC board 325. Computer system 400 includes address/data bus 410, central processor 401, volatile memory 402 (e.g., random access memory RAM), non-volatile memory 403 (e.g., read only memory ROM), optional removable data storage device 404 (e.g., memory stick), display module 305 (including wave guide array 220 and light pipe 243), optional alphanumeric input device 406, optional cursor control or directing device 407, and signal communication port 408, modem 409. Address/data bus 410 is coupled to central processor 401, volatile memory 402 (e.g., random access memory RAM), non-volatile memory 403 (e.g., read only memory ROM), optional removable data storage device 404 (e.g., memory stick), display module 305, optional alphanumeric input device 406, optional cursor control or directing device 407, and signal communication port 408, modem 409.

The components of computer system 400 cooperatively function to provide a variety of functions, including PIM, communications, etc. Address/data bus 410 communicates information, central processor 401 processes information and instructions, volatile memory 402 (e.g., random access memory RAM) stores information and instructions for the central processor 401 and non-volatile memory 403 (e.g., read only memory ROM) stores static information and instructions. Optional removable data storage device 404 (e.g., memory stick) also stores information and instructions. Display module 305 displays information to the computer user and an

optional alphanumeric input device 406 is an input device, which in one implementation is a handwriting recognition pad ("digitizer") having regions 306a and 306b (see Figure 3A). Optional directing device 407 also communicates user input information and command selections to the central processor 401 via a touch screen capable of registering a position on the screen of display module 305 where the stylus makes contact. Signal Communication port 408 is a communication interface (e.g., serial communications port 308) for communicating signals to and from a coupled peripheral device (not shown). Modem 409 facilitates communications with other devices.

Figure 5A is a side view and Figure 5B is a top view of a block diagram of display illumination distribution system 500, one embodiment of the present invention. Display illumination distribution system 500 is similar to display illumination distribution system 200 except display illumination distribution system 500 includes additional user input features. In one embodiment of the present invention, display illumination distribution system 500 is implemented in palm held computer system 300. Display illumination distribution system 500 comprises dual light source 510, wave guide array 520, culminating lenses (e.g., culminating lens 533), gathering lenses (e.g. gathering lens 537), wave guide array 525, light detector 570, distribution lenses (e.g., distribution lens 535), light pipe 543 and display 598.

Dual light source 510 provides two different types of light (e.g., sensory light waves and illumination light waves) to wave guide array 520. In one embodiment of the present invention, the two different types of light are non interfering types of light. In one exemplary implementation of the present invention, one type of light is a sensory light such as infrared (IR) light and the other type of light is a visible light such as white light from a light emitting diode (LED). In one embodiment of the present invention, light source 510 comprises IR light source 513 and visible light source 515. Wave guide array 520 includes a plurality of wave guides (e.g., in a fishbone pattern) each directing light waves from light source 520 to a lens. Wave guide array 525 also includes a plurality of wave guides (e.g., in a fishbone pattern) each directing light waves from a gathering lens to light detector 570. Similar to light pipe 243, light pipe 543 distributes and emits light for illuminating display 598.

The sensory light waves from the sensory light source (e.g., IR light source 513) are directed in waveguide 520 to culminating lenses (e.g., culminating lens 533) and distributed above the display in a grid pattern from the cumulative lenses across to the gathering lenses (gathering lens 537). If a sensory light wave grid is broken then light detector 570 senses the break in the light wave and interprets it as a user input. In one embodiment of the present invention, a user places an object (e.g., a finger or stylus) in a position that blocks or breaks the sensory light waves at a particular location in the

grid. The location is associated with certain input information (e.g., an icon) and by analyzing which row(s) and column(s) of sensory light waves are interrupted, light detector 570 determines the location of the interruption and thus the input information selection.

5

Figure 5C is a top view of a block diagram of display illumination distribution system 500 at the pipe light level. Similar to waveguide 220, the visible light is also diverted through wave guide array 520 providing more effective distribution of light waves emanating from the distribution lenses (e.g., distribution lens 535). For example, light wave guides included in wave guide array 520 convey light to the distribution lenses with greater intensity because the walls of the wave guides confine the light waves to a restricted path and they do not dissipate away from the light pipe. Similar to waves guide included in wave guide array 220, the walls of the wave guides included in wave guide array 520 are also constructed of highly reflective material so that a significant portion of the light is reflected along the wave guide path resulting in increased emission at the lens onto the light pipe.

Again, it is appreciated that there are a variety of different implementations of display illumination distribution system 500 with implementation flexibility similar to display illumination distribution system 200. For example, some embodiments of display illumination distribution system 500 have a straight through light pipe and some embodiments of light

pipe 543 include microstructures, in some embodiments protective shield 545 comprises a plastic substrate and in another it comprises a glass substrate.

Figure 6 A is a block diagram of one embodiment of the present invention comprising two separate wave guide arrays, one for sensory light (e.g.,

5 waveguide array 520A) and the other for visible light waves (e.g., wave guide array 520B). Figure 6 B is a block diagram of one exemplary implementation of the present invention comprising a lens (e.g., lens 539) that serves to disperse both the illumination and sensory light waves.

10 Figure 7 is a flow chart of display illumination distribution method 700, one embodiment of the present invention. Display illumination distribution method 700 facilitates efficient and even distribution of illumination for a display screen. Display illumination distribution method 700 enables greater intensity of illumination with a smaller light source and  
15 reduced consumption of energy resources.

In step 710 light is emitted from a light source. In one exemplary implementation the light is visible light. In one embodiment of the present invention two different types of light are emitted. For example,  
20 noninterfering light waves such as a sensory light waves (e.g., IR) and visible light wave (e.g., white light from an LED) are emitted.

In step 720 the emitted light is directed in a wave guide. In one embodiment of the present invention the light waves are reflected off the walls of the wave guide. In one exemplary implementation, the emitted light is directed through a plurality of wave guides included in a wave guide array.

5

In step 730 the light is propagated through a lens into a light pipe. In one embodiment of the present invention the lens act as a cumulating lens. One exemplary implementation of the present invention includes a plurality of lenses.

10

In step 740 the light is conveyed to a display. In one exemplary implementation of the present invention, a portion of the light wave is emitted from the light pipe and another portion is conveyed down the light pipe for emission at a different location in the light pipe.

15

In step 750 light is gathered in a gathering lens and conveyed to a light sensor via a wave guide. In one exemplary implementation the present invention, breaks in the sensory light are detected by the light sensor.

20

Thus, the present invention system and method facilitates efficient illumination of a display screen and a readily viewable presentation of images. The display illumination distribution system and method of the present invention facilitates relatively even distribution of illumination

throughout a display screen while assisting energy conservation. The present invention also facilitates size reduction requirements of a handheld computer.

5           The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and  
10       described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

15



## CLAIMS

What is Claimed is:

- 5 1. A display illumination distribution system comprising:
- a display for displaying an image;
- a light pipe for distributing light waves to a display, said light pipe
- coupled to said display;
- a lens for directing light waves into said light pipe, said lens coupled to
- 10 said light pipe;
- a wave guide array for directing said light waves to said lens, said wave
- guide coupled to said lens; and
- a light source for providing said light waves, said light source coupled
- to said wave guide.
- 15
2. The display illumination distribution system of claim 1 wherein said
- display comprises a protective shield for protecting said display from physical
- damage; said protective shield coupled to said display.
- 20 3. The display illumination distribution system of claim 1 wherein the
- interior walls of each of one of said plurality of wave guides comprise a
- highly reflective material that reflects said light waves down the length of
- said wave guide.

4. The display illumination distribution system of claim 1 wherein the said light waves are confined to said wave guide array and are directed to a plurality of points at the edges of said light pipe.

5

5. The display illumination distribution system of claim 1 wherein said light waves are distributed from said wave guide array so that said light waves form an overlapping grid.

10 6. The display illumination distribution system of claim 1 wherein said light pipe is a straight through light pipe.

7. The display illumination distribution system of claim 1 wherein said light pipe includes microstructures.

15

8. A handheld computer display illumination distribution system comprising:

a display for displaying an image;

a light pipe for distributing illumination light waves to said display,

20 said light pipe coupled to said display;

a lens for directing the illumination light waves and sensory light waves, said lens coupled to said light pipe;

a wave guide array for directing the illumination light waves and the sensory light waves to said lens, said wave guide coupled to said lens; and

a light source for providing the illumination light waves and the sensory light waves, said light source coupled to said wave guide.

5

9. The handheld computer display illumination distribution system of Claim 8 wherein said light source provides non interfering illumination light waves and sensory light waves.

10 10. The handheld computer display illumination distribution system of Claim 8 wherein said lens is a plurality of lenses.

11. The handheld computer display illumination distribution system of Claim 8 wherein said plurality of lenses include a distribution lens and  
15 culminating lens.

12. The handheld computer display illumination distribution system of Claim 11 further comprising:

a gathering lens for collecting said sensory light waves; and

20 a light detector for detecting a break in said sensory light waves, said light detector coupled to said gathering lens.

13. The handheld computer display illumination distribution system of Claim 11 wherein said sensory light is infrared light.

14. The handheld computer display illumination distribution system of  
5 Claim 11 wherein said illumination light is visible white light from a light emitting diode.

15 A display illumination distribution method comprising the steps of  
emitting light from a light source;  
10 directing the emitted light in a wave guide;  
propagating the light waves through a lens into a light pipe; and  
conveying the light to a display.

16 The display illumination distribution method of Claim 15 further  
15 comprising the step of reflecting light waves off the walls of the wave guide.

17 The display illumination distribution method of Claim 15 further  
comprising the steps of:  
emitting a portion of said light waves from said light pipe; and  
20 conveying another portion of said light waves down said light pipe for  
emission at a different location in the light pipe.

18 The display illumination distribution method of Claim 15 in which two different types of light are emitted including a sensory light and a visible light.

5 19 The display illumination distribution method of Claim 18 further comprising the steps of:  
gathering said sensory light waves in a gathering lens; and  
conveying said sensory light waves to a light sensor via a wave guide.

10 20 The display illumination distribution method of Claim 19 further comprising the step of detecting breaks in the sensory light.

## ABSTRACT

The present invention system and method facilitates efficient and relatively even distribution of illumination throughout a display screen. The system and method should also facilitate clearer presentation of images, size reductions and conservation of limited power resources in handheld computers. In one embodiment of the present invention, a display illumination distribution system includes a light pipe, a lens, a wave guide array and a light source. The light source provides light waves that are directed along the wave guide array to the lens which directs the light waves into the light pipe. The light pipe conveys the light to the display and provides illumination. The routing of light through the wave guide array confines the light waves to a wave guide and reduces the number of light waves that miss the light pipe. In one embodiment of the present invention the interior walls of each wave guide include a highly reflective material that reflects light waves down the length of the wave guide with minimal light loss due to absorption. In one embodiment of the present invention, the display illumination distribution system and method directs visible light waves through a wave guide array to multiple points along the edge of the light pipe that illuminates the display and provides more effective distribution of light into the light pipe.

100

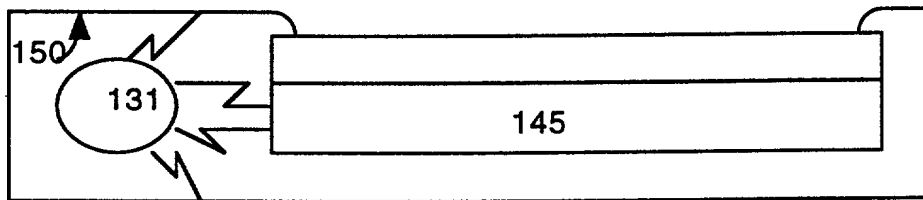
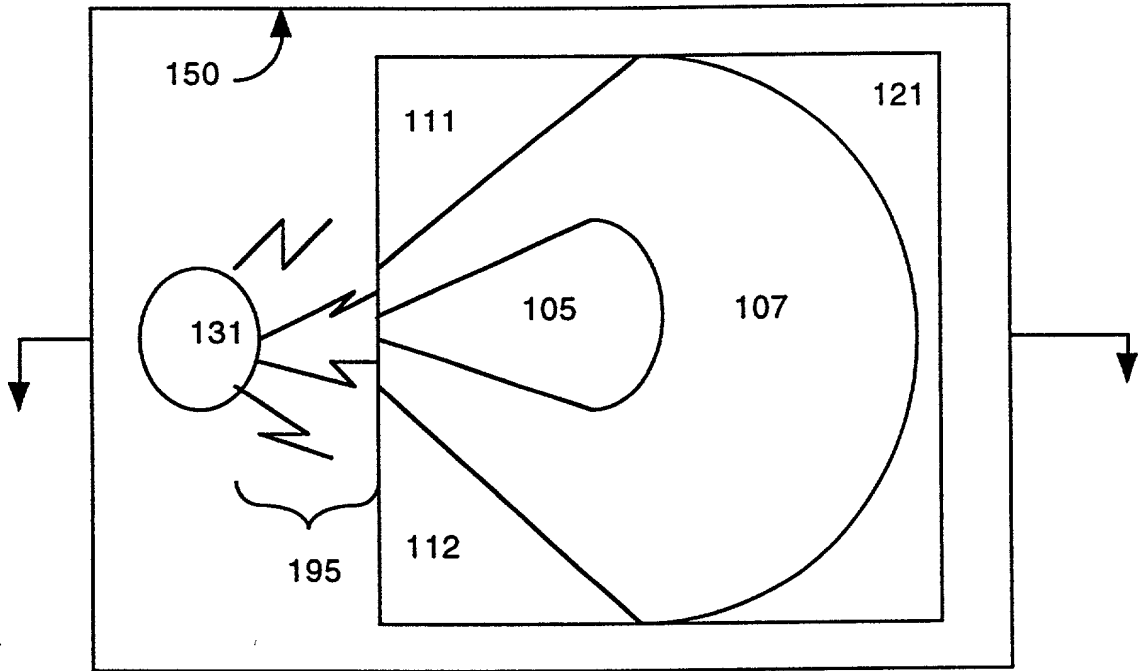


FIG 1

200

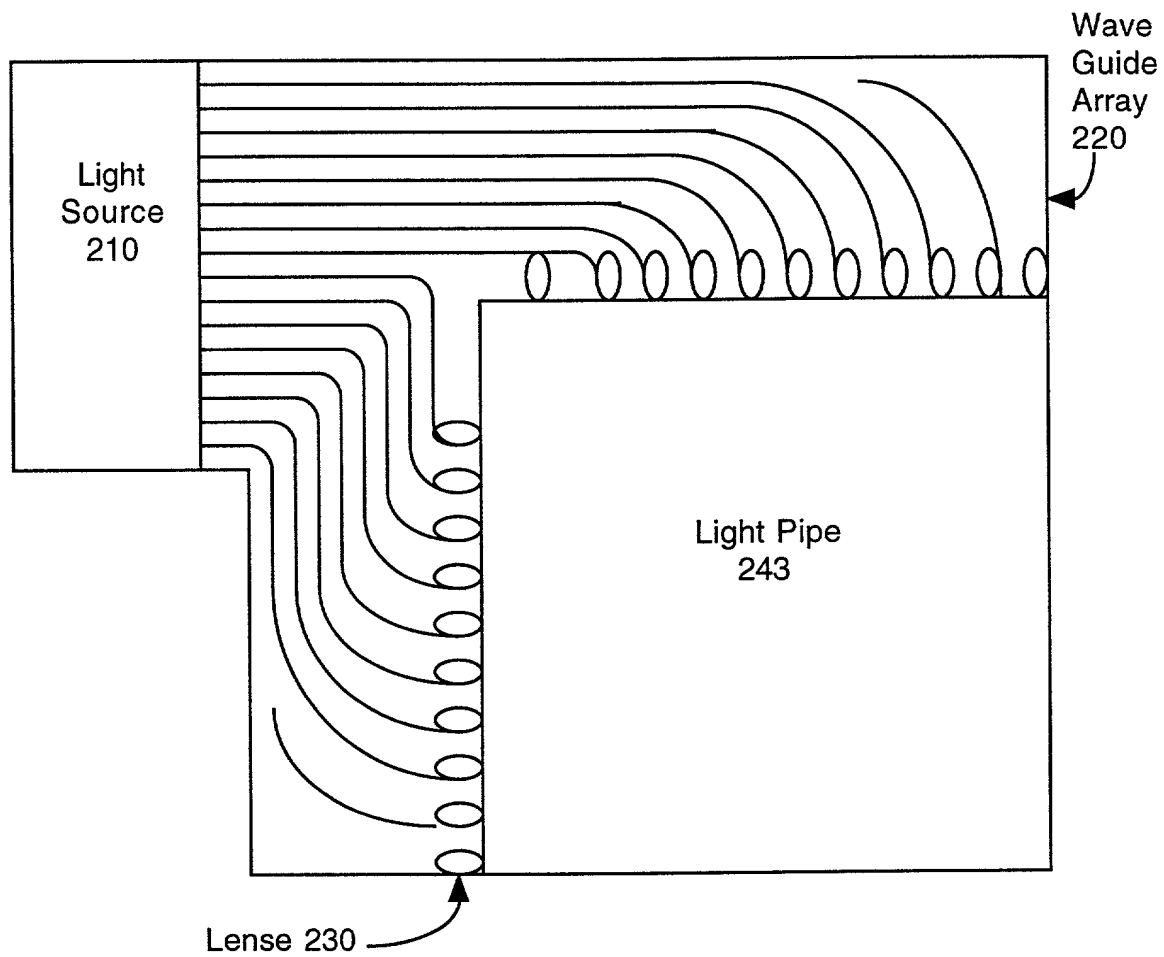


FIG 2A

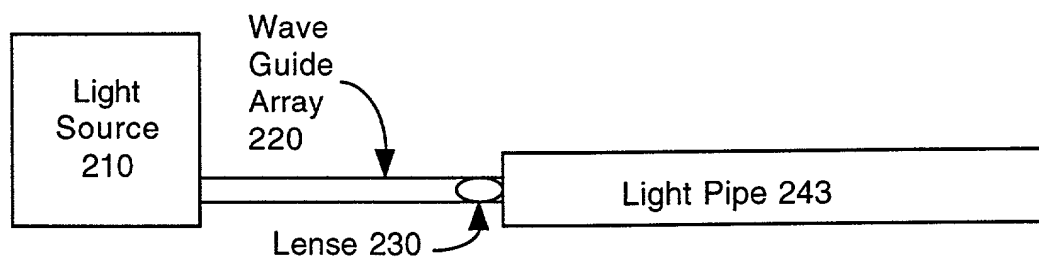


FIG 2B



200


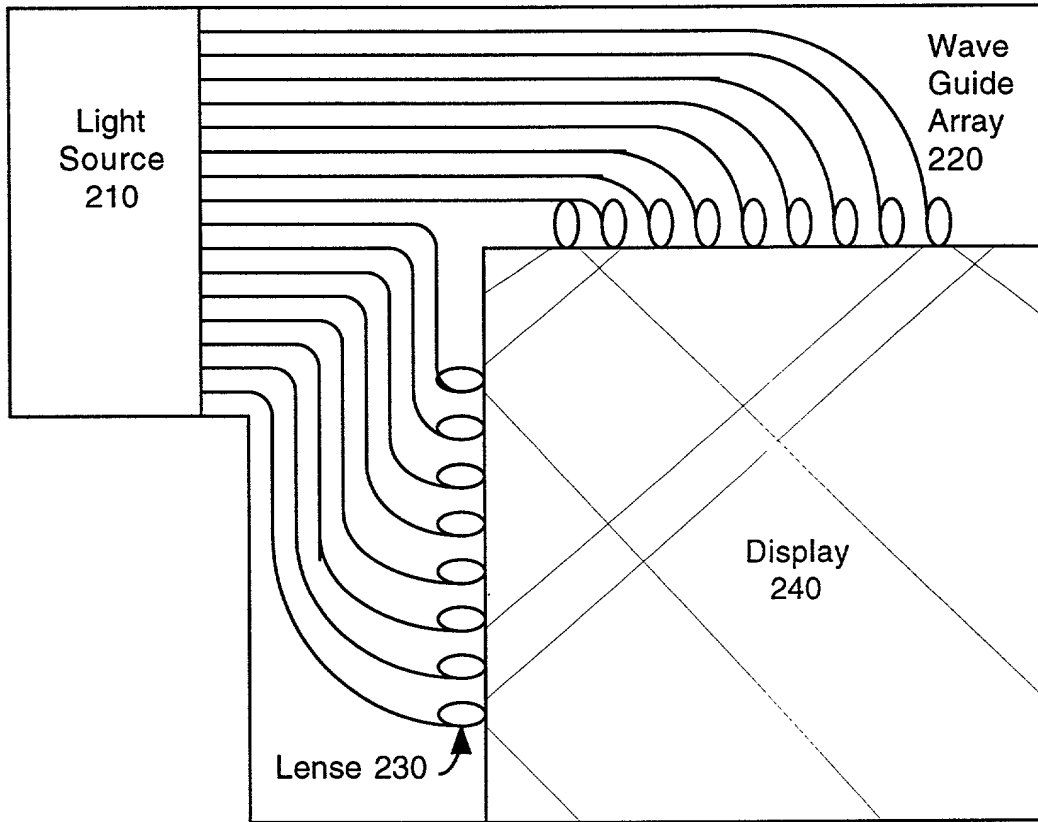


FIG 2C

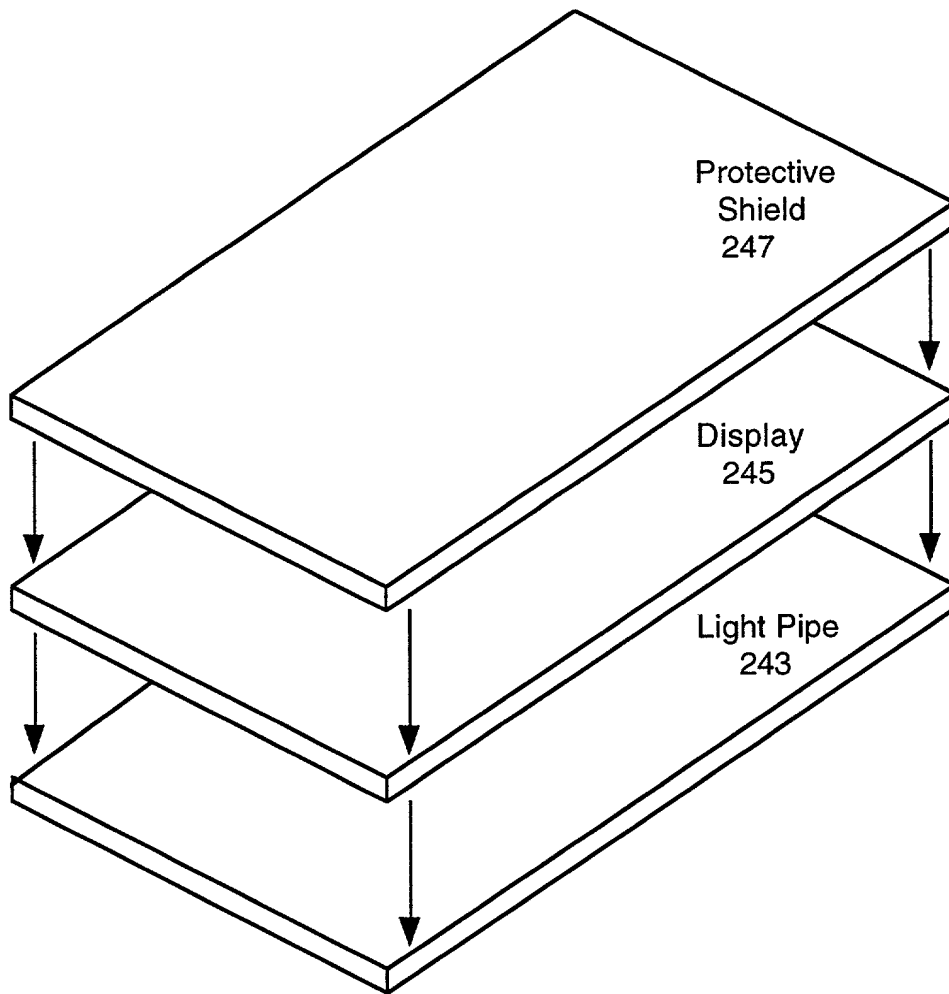

FIC 2D

300a

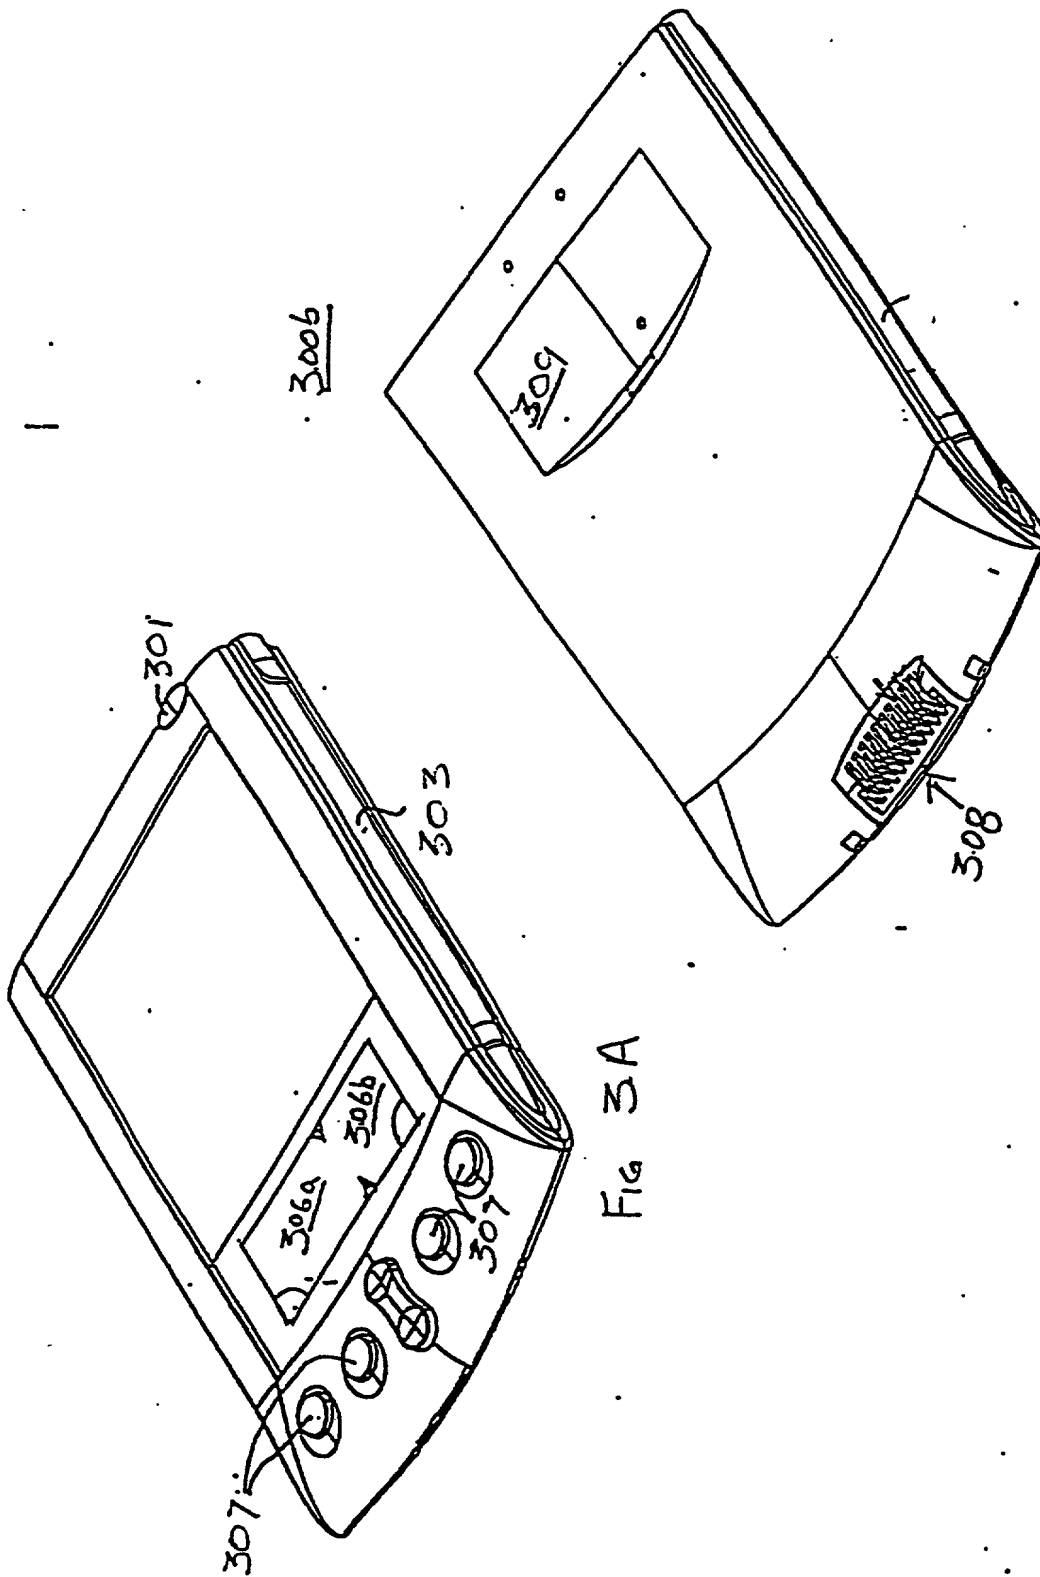


Fig 3B

Fig 3A

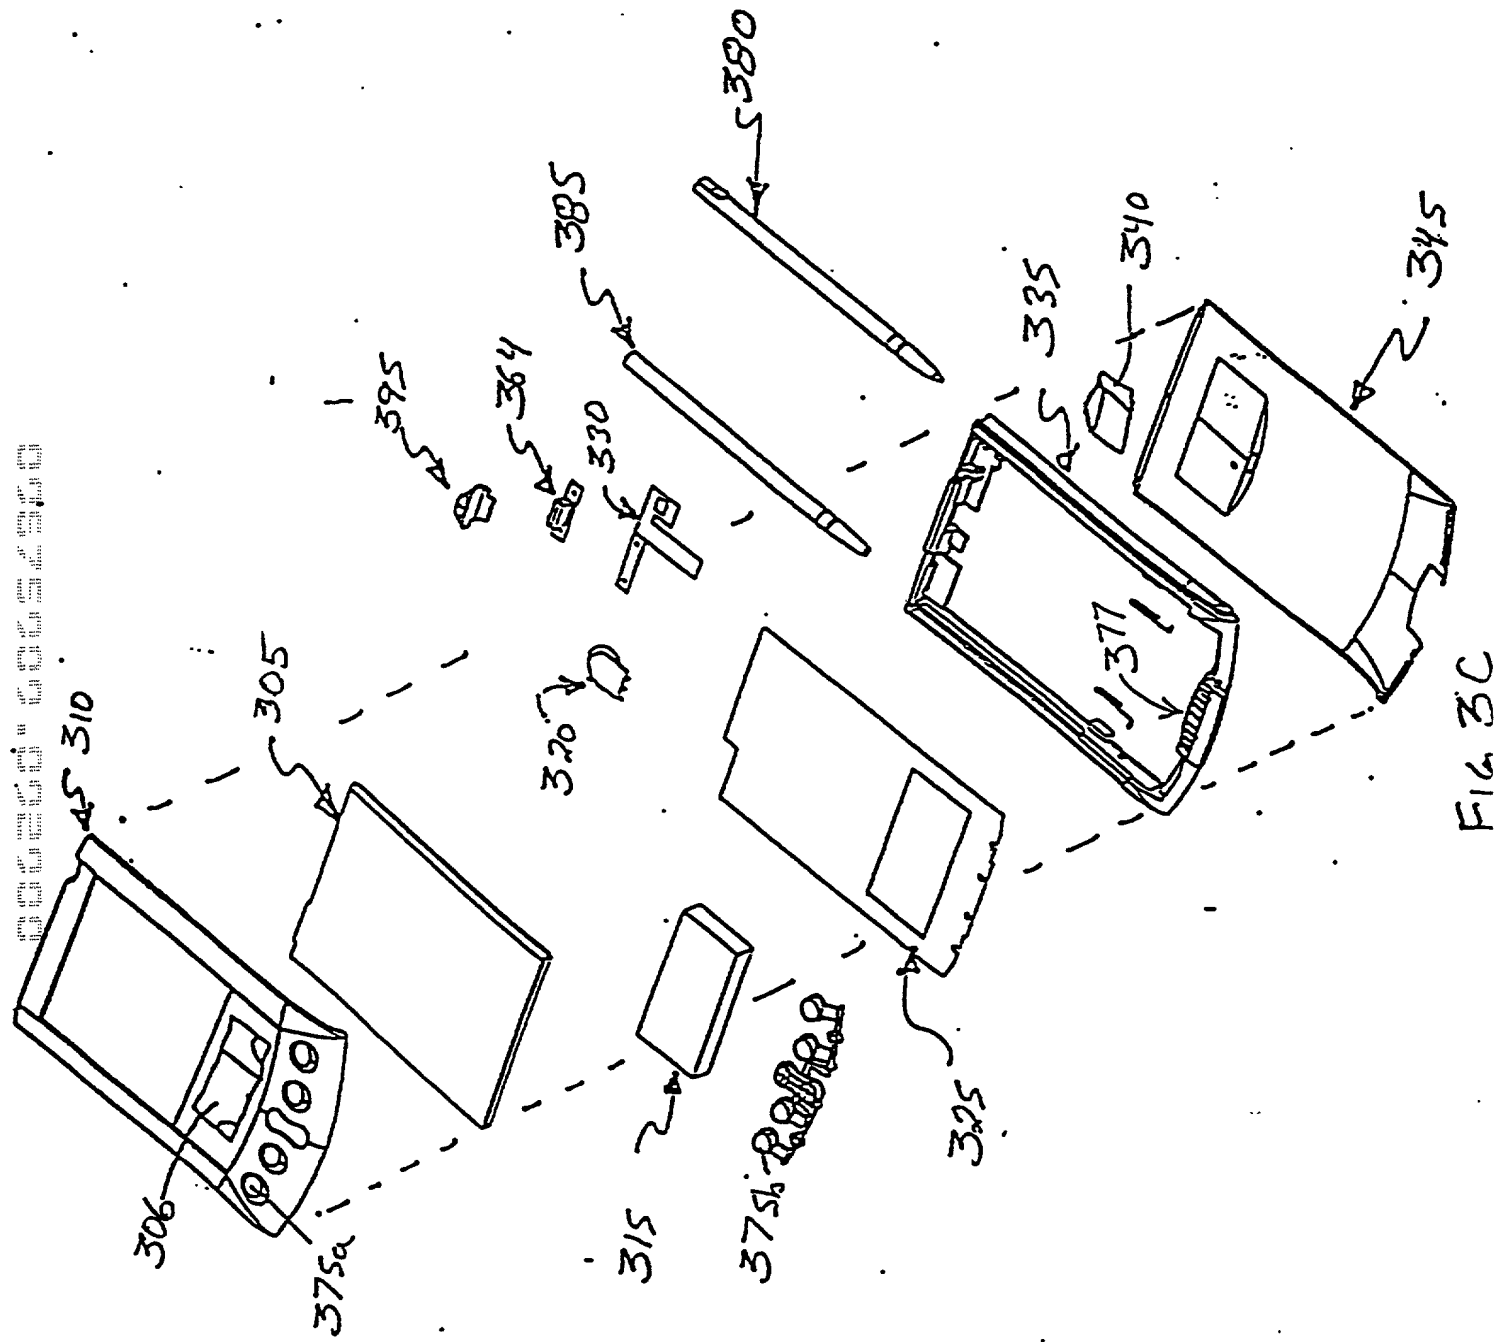


FIG 3C

400

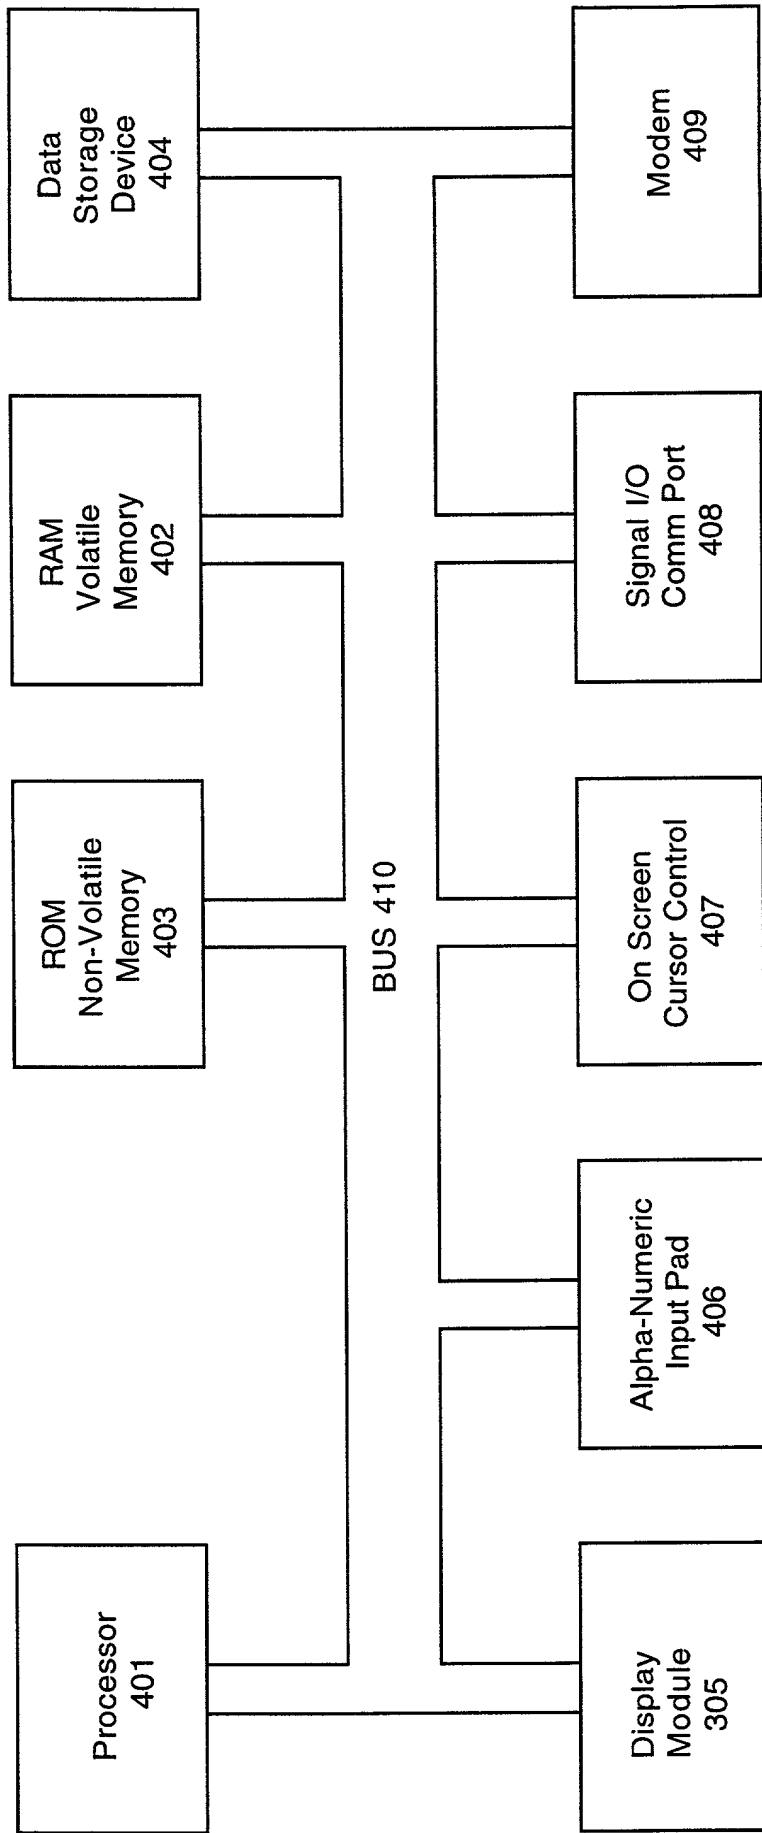


FIG. 4

500

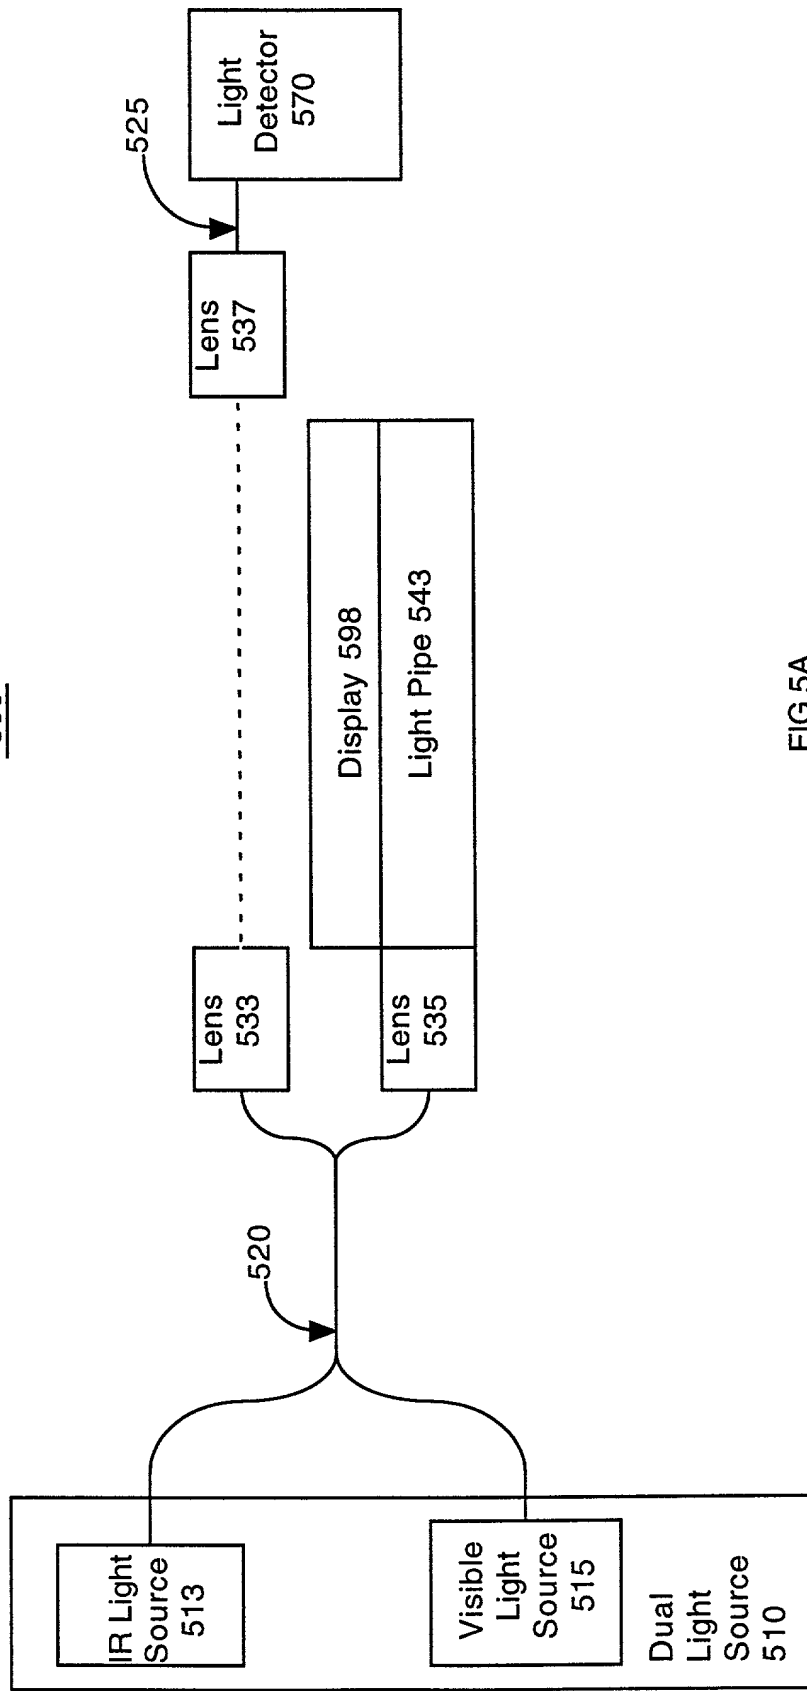


FIG 5A

500

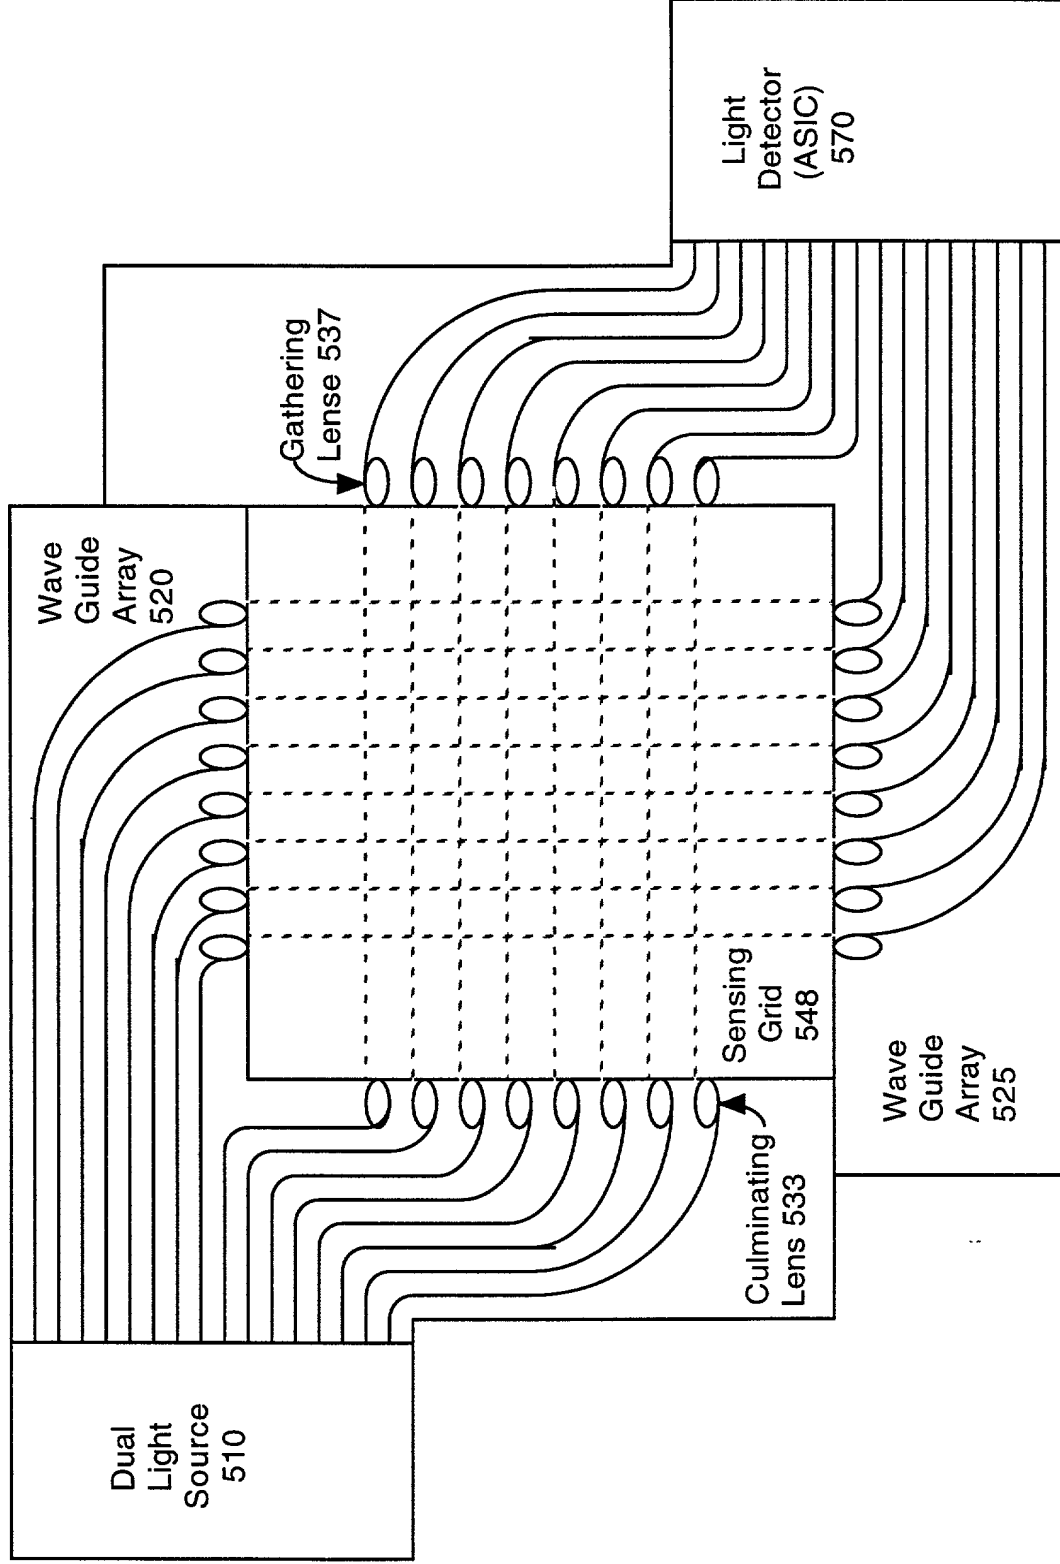


FIG 5B

500

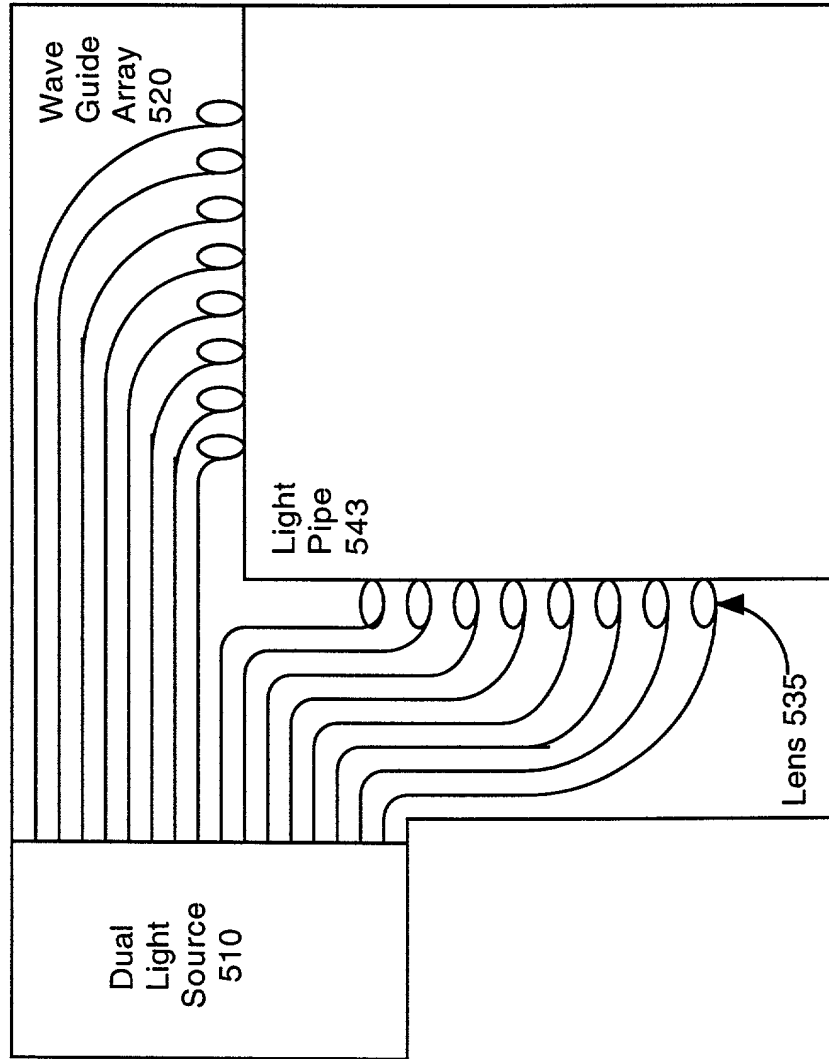


FIG 5 C



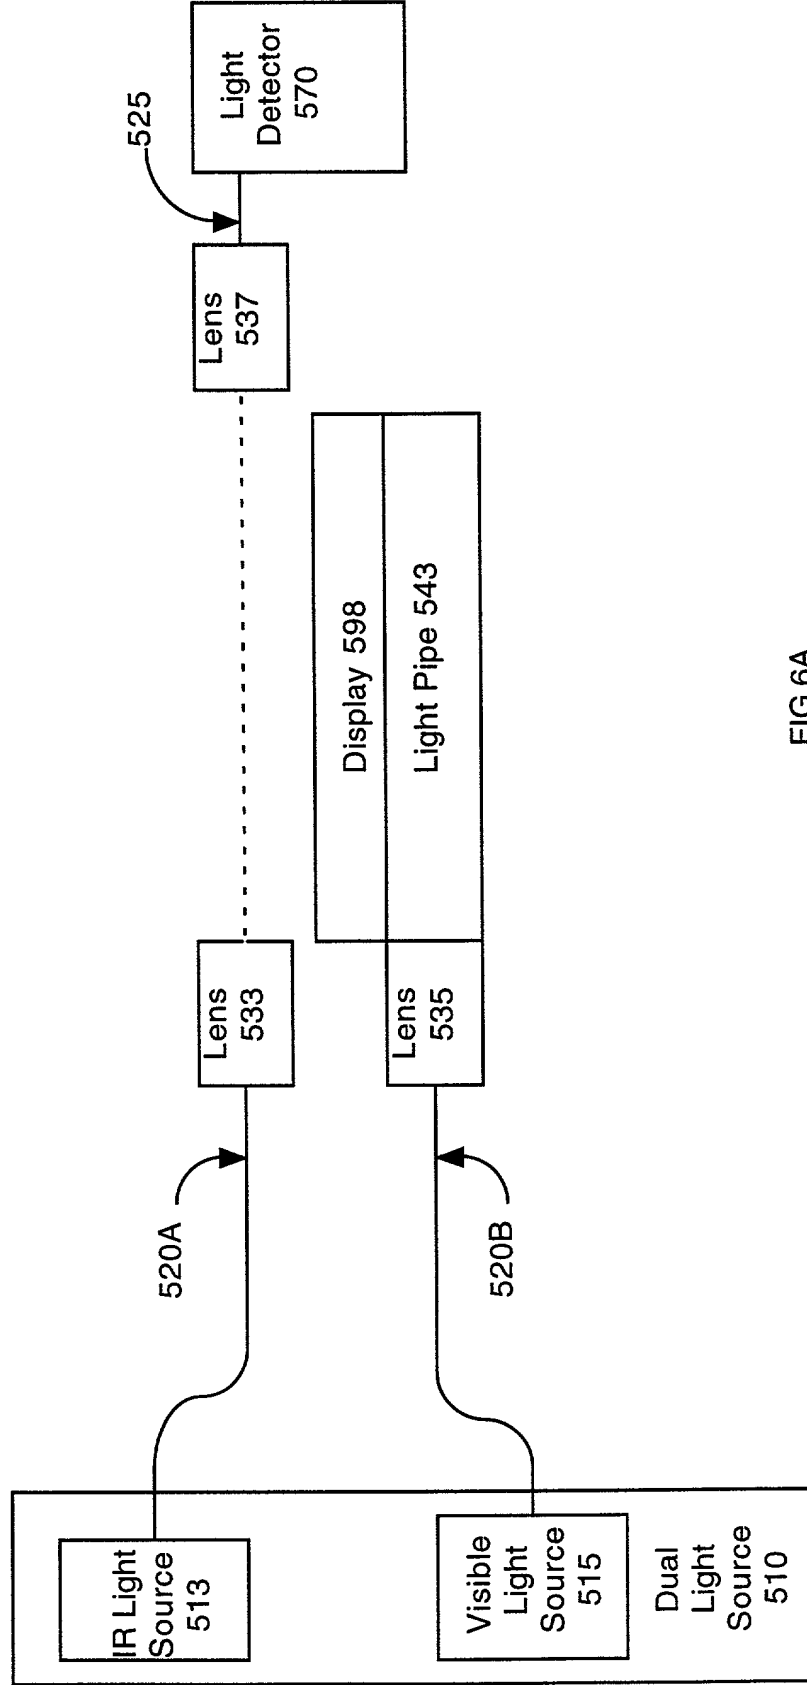


FIG 6A

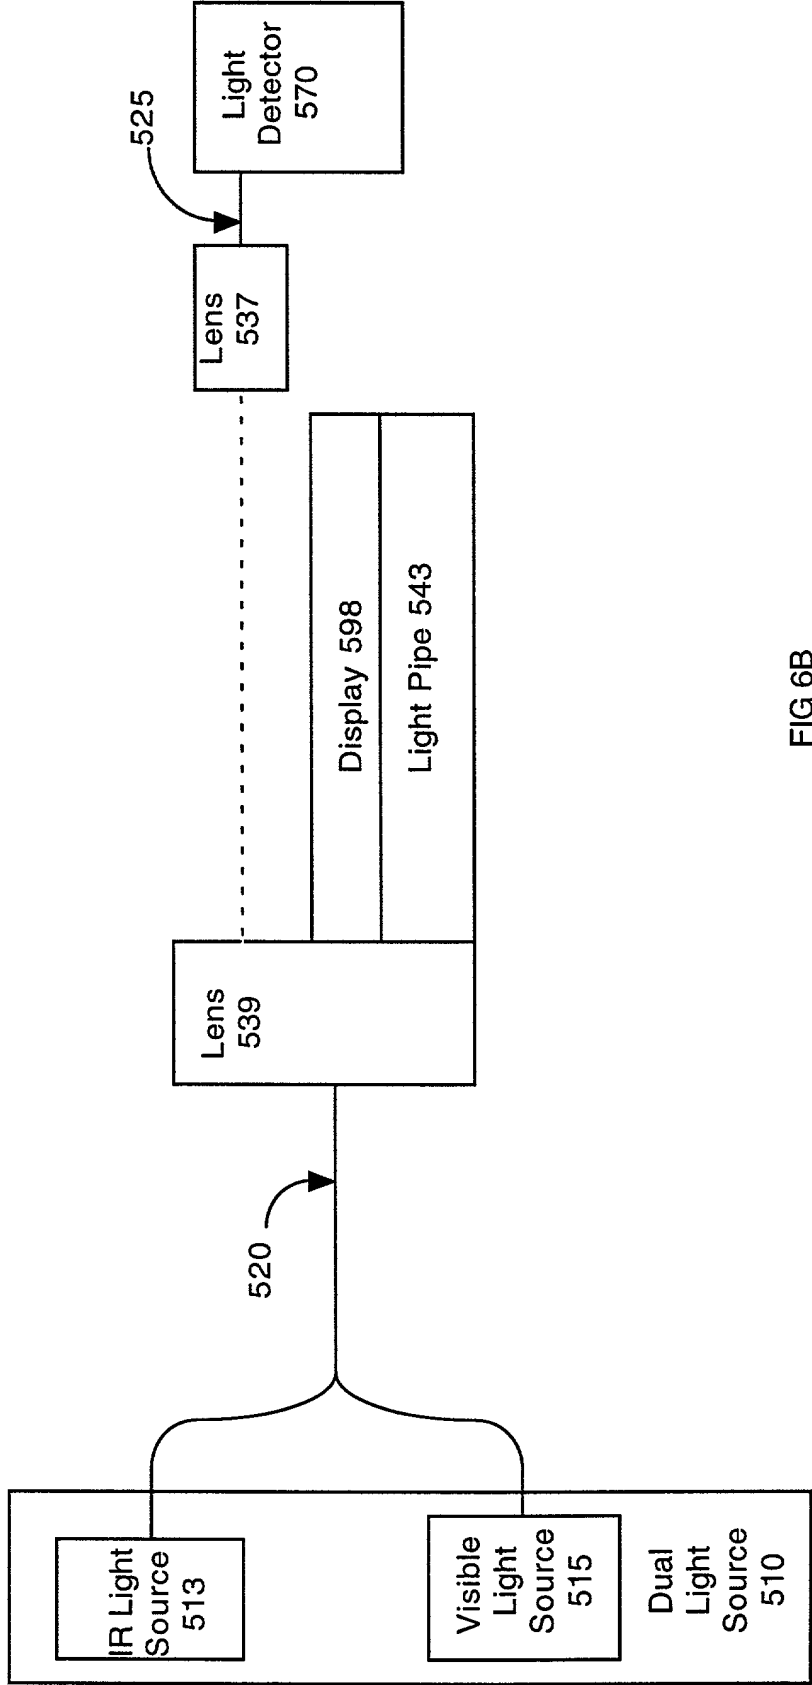


FIG 6B

700

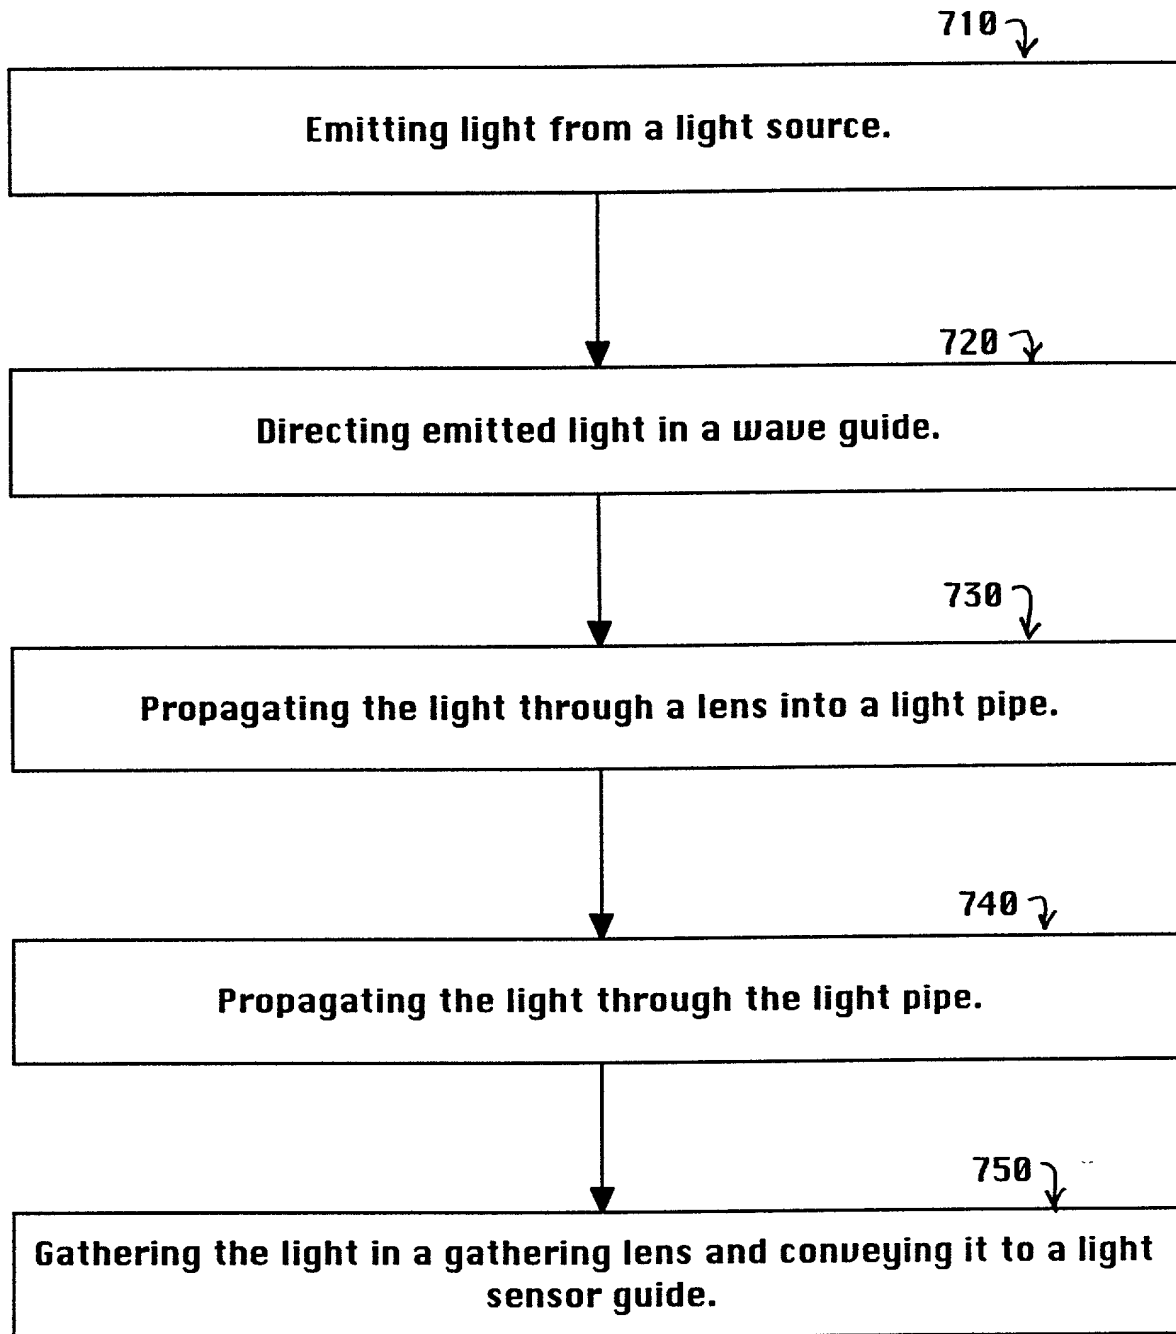


FIG 7

## Declaration and Power of Attorney for a Patent Application

### Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A PERSONAL DIGITAL ASSISTANT DISPLAY ILLUMINATION METHOD AND SYSTEM

the specification of which:

☒ is attached hereto, or  
 ..... was filed on ..... as application serial no. .... : and  
 ..... was amended on .....

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

### Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
.....	.....	.....	..... yes ..... no
.....	.....	.....	..... yes ..... no

### U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 and 199(e) of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....	.....	.....
.....	.....	.....

**Power of Attorney**

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

James P. Hao	Registration No.: 36,398
Anthony C. Murabito	Registration No.: 35,295
John P. Wagner	Registration No.: 35,398
Glenn D. Barnes	Registration No.: 42,293
Rick G. Brewster	Registration No.: 35,077
Thomas M. Catale	Registration No.: 46,434
Jose S. Garcia	Registration No.: 43,628
Kenneth N. Glass	Registration No.: 42,587
Lin C. Hsu	Registration No.: 46,315
Patrick W. Ma	Registration No.: 44,215
Ronald M. Pomerence	Registration No.: 43,009
John F. Ryan	Registration No.: 47,050
William A. Zarbis	Registration No.: 46,120
Matthew J. Blecher	Registration No.: 46,558

Send Correspondence to:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street  
Third Floor  
San Jose, California 95113  
(408) 938-9060

**Signatures**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Shawn Gettemy

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence San Jose, CA Citizenship USA  
(City State)  
P.O. Address 901 Del Avion Lane, San Jose, CA 95138

Full Name of Second/Joint Inventor: Rajiv Pethe

Inventor's Signature R. Pethe Date 9/29/2000  
Residence San Jose, CA Citizenship India  
(City State)  
P.O. Address 3680 Springbrook Ave., San Jose, CA 95148

## Declaration and Power of Attorney for a Patent Application

### Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A PERSONAL DIGITAL ASSISTANT DISPLAY ILLUMINATION METHOD AND SYSTEM

the specification of which:

☒ is attached hereto, or  
 ..... was filed on ..... as application serial no. .... : and  
 ..... was amended on .....

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

### Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
.....	.....	.....	..... yes ..... no
.....	.....	.....	..... yes ..... no

### U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 and 199(e) of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....	.....	.....
.....	.....	.....

## Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

James P. Hao	Registration No.: 36,398
Anthony C. Murabito	Registration No.: 35,295
John P. Wagner	Registration No.: 35,398
Glenn D. Barnes	Registration No.: 42,293
Rick G. Brewster	Registration No.: 35,077
Thomas M. Catale	Registration No.: 46,434
Jose S. Garcia	Registration No.: 43,628
Kenneth N. Glass	Registration No.: 42,587
Lin C. Hsu	Registration No.: 46,315
Patrick W. Ma	Registration No.: 44,215
Ronald M. Pomerence	Registration No.: 43,009
John F. Ryan	Registration No.: 47,050
William A. Zarbis	Registration No.: 46,120
Matthew J. Blecher	Registration No.: 46,558


Send Correspondence to:

**WAGNER, MURABITO & HAO LLP**  
Two North Market Street  
Third Floor  
San Jose, California 95113  
(408) 938-9060

## Signatures

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Shawn Gettemy

Inventor's Signature  Date X 9/29/2000  
Residence San Jose, CA Citizenship USA  
(City State)  
P.O. Address 901 Del Avion Lane, San Jose, CA 95138

Full Name of Second/Joint Inventor: Rajiv Pethe

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence San Jose, CA Citizenship India  
(City State)  
P.O. Address 3680 Springbrook Ave., San Jose, CA 95148